

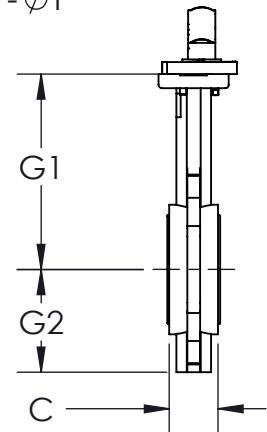
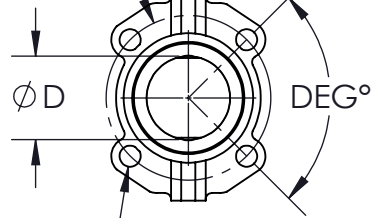


Ø B (B.C.)

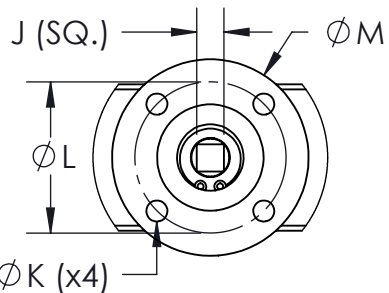

TOPWORKS



SIZE	A	B	C	øD	E-øF	DEG°	G1	G2	J1 (SQ.)	øK	øL	øM	N	ISO 5211	WEIGHT (lbs)	Cv	TORQUE (in-lbf)
2"	0.55 (14)	4.75 (121)	1.69 (43)	2.09 (53)	4-0.75	90°	6.34 (161)	3.15 (80)	0.35 (9)	0.28 (7)	1.97 (50)	2.56 (65)	7.15 (182)	F05	14	115	123
2-1/2"	0.55 (14)	5.51 (140)	1.77 (45)	2.56 (65)	4-0.75	90°	6.89 (175)	3.50 (89)	0.35 (9)	0.28 (7)	1.97 (50)	2.56 (65)	7.15 (182)	F05	15	196	136
3"	0.55 (14)	5.98 (152)	1.77 (45)	3.11 (79)	4-0.75	90°	7.13 (181)	3.74 (95)	0.35 (9)	0.28 (7)	2.76 (70)	2.56 (65)	7.15 (182)	F07	16	302	192
4"	0.55 (14)	7.51 (191)	2.05 (52)	4.09 (104)	8-0.89	45°	7.87 (200)	4.49 (114)	0.43 (11)	0.39 (10)	2.76 (70)	3.54 (90)	8.90 (226)	F07	19	600	328
6"	0.67 (17)	9.49 (241)	2.20 (56)	6.10 (155)	8-0.89	45°	8.90 (226)	5.47 (139)	0.55 (14)	0.39 (10)	2.76 (70)	3.54 (90)	8.90 (226)	F07	27	1579	831
8"	0.94 (24)	11.77 (299)	2.36 (60)	8.00 (203)	8-0.89	45°	10.24 (260)	6.89 (175)	0.67 (17)	0.39 (10)	4.02 (102)	4.92 (125)	13.98 (355)	F10	45	3136	1531

PRODUCT INFORMATION:


1. SEAT MATERIAL AVAILABLE IN: BUNA AND EPDM
2. TEN POSITION LEVER HANDLE
3. GEAR OP AVAILABLE FOR SIZES 6" AND 8"
4. COMPLETE BUTTERFLY VALVE AUTOMATION

APPLICABLE STANDARDS:


1. API 609: DESIGN CODE/ FACE TO FACE
2. ISO 5211: MOUNTING
3. API 598: INSPECTION AND TEST
4. ANSI 150LB: END STANDARD

ITEM NO.	DESCRIPTION	MATERIALS	QTY.
1	BODY	A536	1
2	DISC	A351-CF8M	1
3	SEAT	BUNA EPDM	1
4	SHAFT	410 STAINLESS STEEL	1
5	BUSHING	PTFE	4
6	O-RING	NBR	1
7	RETAINER RING	304 STAINLESS STEEL	1
8	INDICATOR	A216-WCB	1
9	HANDLE LEVER	MALLEABLE IRON	1
10	BOLT	304 STAINLESS STEEL	2
11	NUT	304 STAINLESS STEEL	2

MALLEABLE LEVERS:



SIZES 2"-6"



SIZE 8"

DRAWN BY
E.P.
CHECKED BY
E.G.
APPROVED BY
J.S.
(FOR REF ONLY IF NOT APPROVED)

DATE
05/12/2017
DATE
03/22/2018
DATE
03/22/2018

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SVF FLOW CONTROLS, INC. ANY REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN CONSENT OF SVF FLOW CONTROLS, INC. IS PROHIBITED.



DESCRIPTION:

2" - 8" STREAMLINE WAFER BUTTERFLY VALVE

UNITS: INCH (MILLIMETERS)


DATE: 03/22/2018

REV: B




SIZE	A	B	C	øD	E-øF	DEG°	G1	G2	J1 (SQ.)	øK	øL	øM	N1	N2	N3	N4	N5	W	ISO 5211	WEIGHT (lbs)	Cv	TORQUE (in-lbf)
10"	0.94 (24)	14.25 (362)	2.68 (68)	9.86 (251)	4-0.89	30°	11.50 (292)	8.00 (203)	0.87 (22)	0.47 (12)	4.02 (102)	4.92 (125)	9.84 (250)	2.95 (75)	3.39 (86)	2.48 (63)	2.95 (75)	11.80 (300)	F10	65	5340	2531
12"	0.94 (24)	17.00 (432)	3.07 (78)	11.89 (302)	4-0.89	30°	13.27 (337)	9.53 (242)	0.87 (22)	0.47 (12)	4.02 (102)	4.92 (125)	8.94 (227)	3.19 (81)	3.27 (83)	3.19 (81)	3.19 (81)	11.80 (300)	F10	81	8250	3797

1

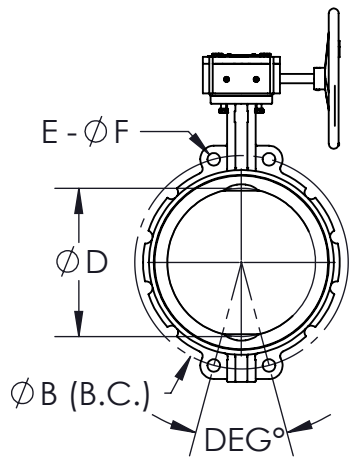


2

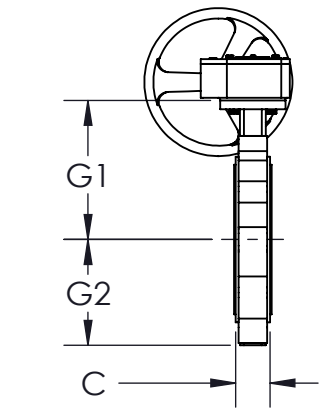


3

4

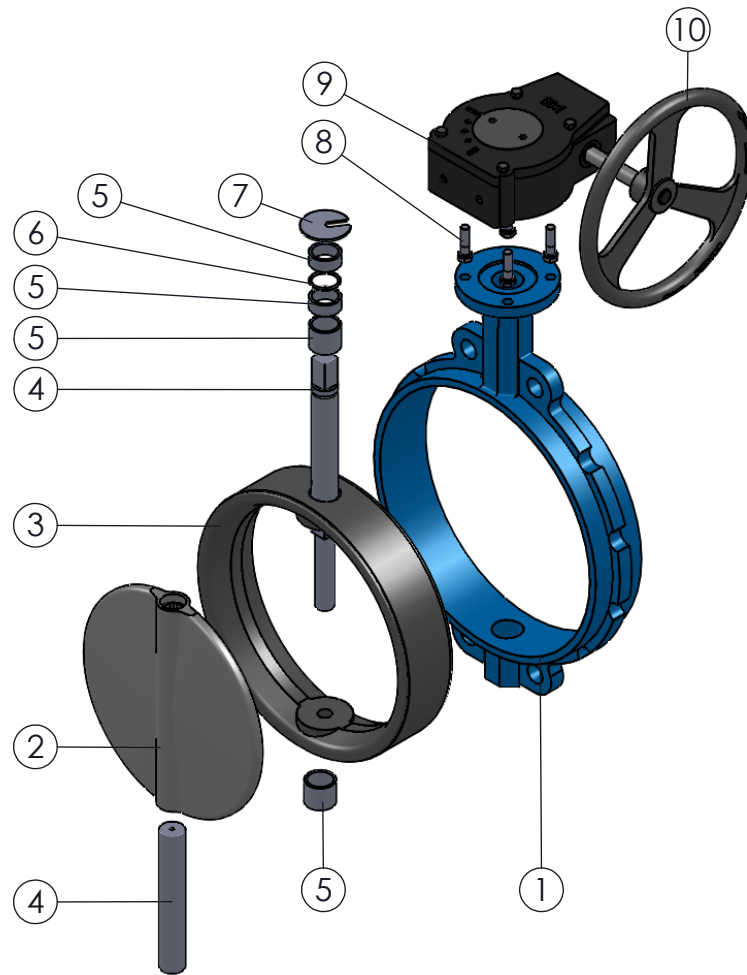

GEAR OP WITH HANDWHEEL:

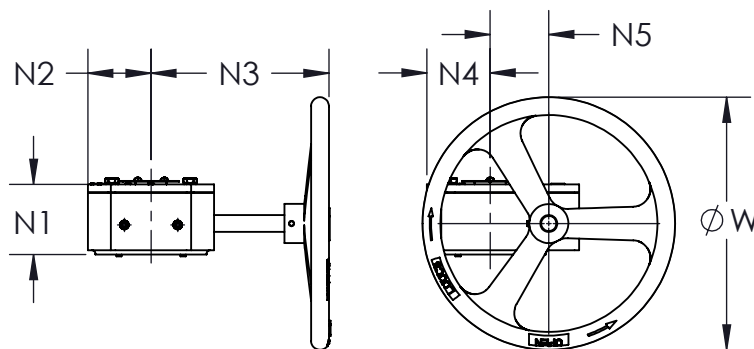

PRODUCT INFORMATION:
 1. SEAT MATERIAL AVAILABLE IN: BUNA AND EPDM
 2. COMPLETE BUTTERFLY VALVE AUTOMATION

APPLICABLE STANDARDS:
 1. API 609: DESIGN CODE/ FACE TO FACE
 2. ISO 5211: MOUNTING
 3. API 598: INSPECTION AND TEST
 4. ANSI 150LB: END STANDARD

ITEM NO.	DESCRIPTION	MATERIALS	QTY.
1	BODY	A536	1
2	DISC	A351-CF8M	1
3	SEAT	BUNA EPDM	1
4	SHAFT	410 STAINLESS STEEL	1
5	BUSHING	PTFE	4
6	O-RING	NBR	1
7	RETAINER RING	A276-316	1
8	BOLT	304 STAINLESS STEEL	4
9	GEAR OP	A48	1
10	HANDWHEEL	A48	1


3

4


5

6

TOPWORKS



5

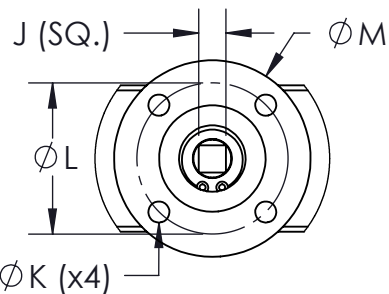


6

DRAWN BY E.P.
 CHECKED BY E.G.
 APPROVED BY J.S.
(FOR REF ONLY IF NOT APPROVED)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SVF FLOW CONTROLS, INC. ANY REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN CONSENT OF SVF FLOW CONTROLS, INC. IS PROHIBITED.

DATE 05/12/2017
 DATE 03/22/2018
 DATE 03/22/2018



DESCRIPTION:
 10" AND 12" STREAMLINE WAFER BUTTERFLY VALVE

UNITS: INCH (MILLIMETERS) DATE: 03/22/2018 REV: B

A

B

C

D

E

F

G